




Dell Inspiron 11-3147 Replace the Battery Replacement

Replace a the internal battery

Written By: William Brum

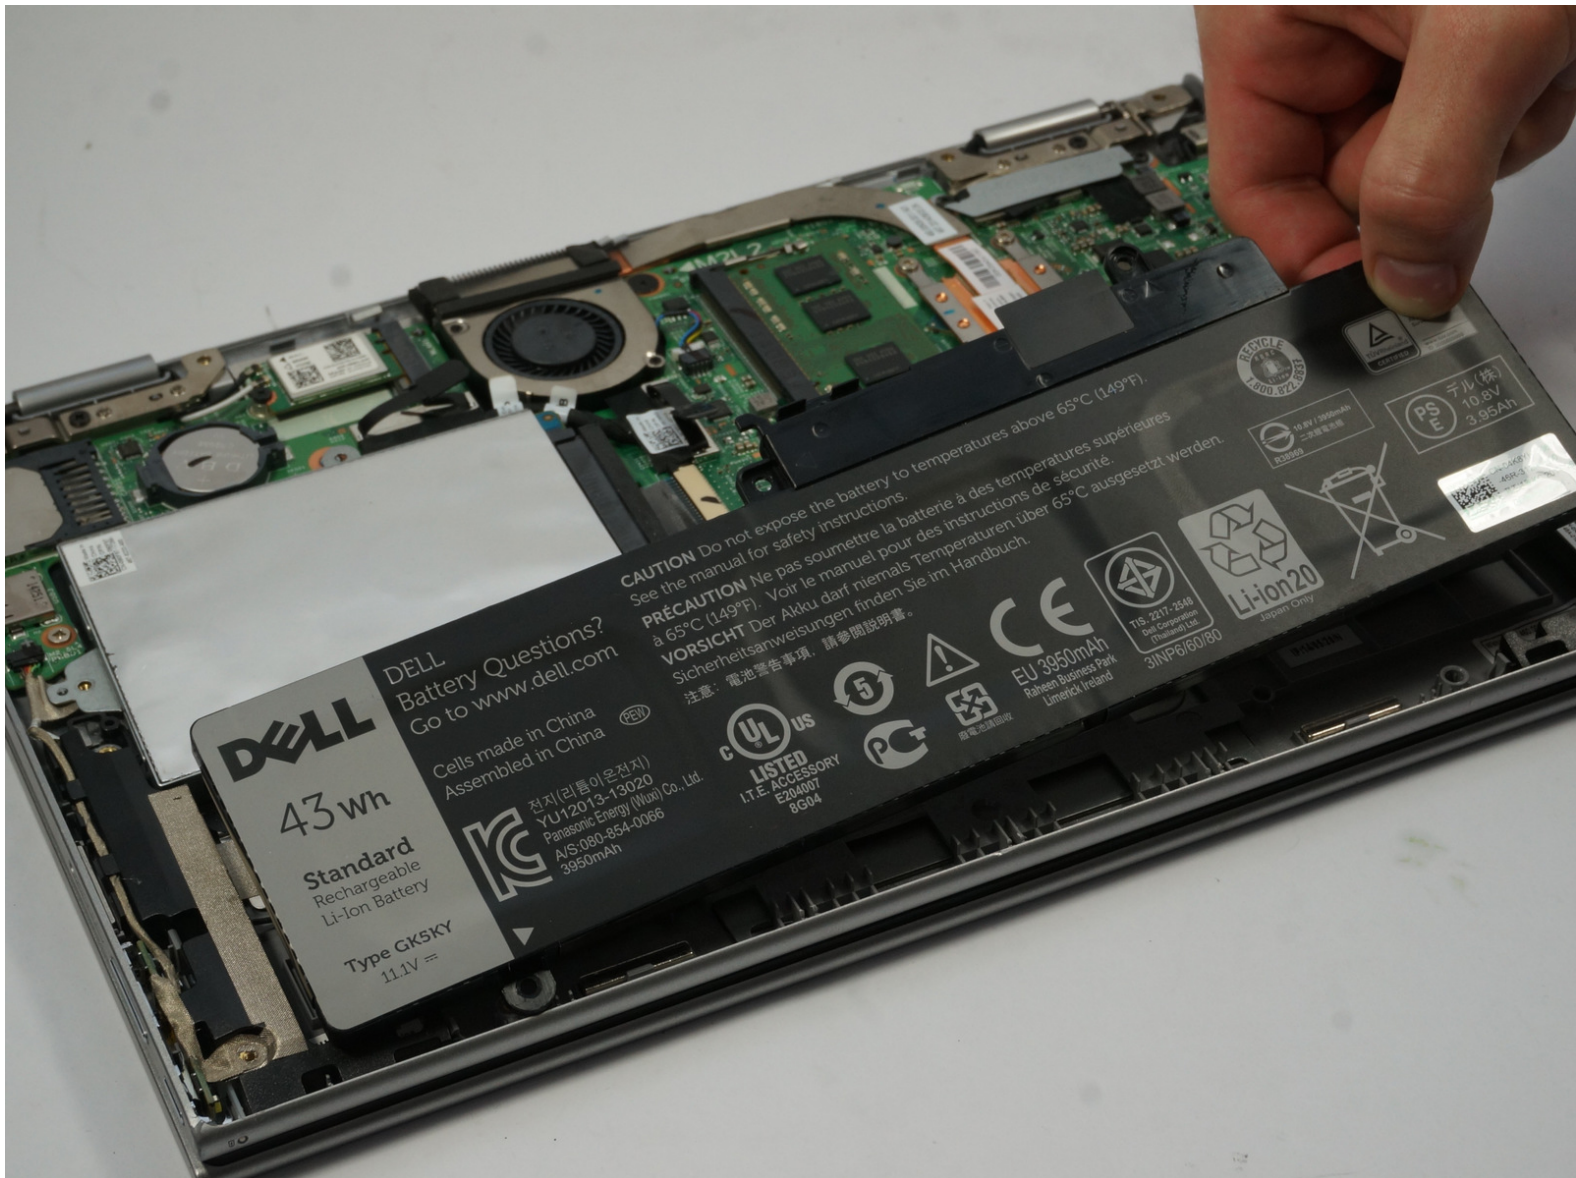

INTRODUCTION

This guide provides the steps involved with replacing a broken or failing battery. You will need two Philips head screw drivers, One #1 and also a #0. Its a short and simple process as long as the guide is followed exactly as shown.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)



PARTS:


- [Inspiron 11-3147 Battery](#) (1)

Step 1 — Battery



- Using a Philips Head #1 Screw Driver remove the nine .7mm screws holding the back cover in place.
- The cover is held on with small plastic tabs. Starting from the back of the machine use your hands to gently pry the back cover from the machine and release these tabs. While a tool is not necessary a plastic plunger can be used to lift the first few tabs.

Step 2

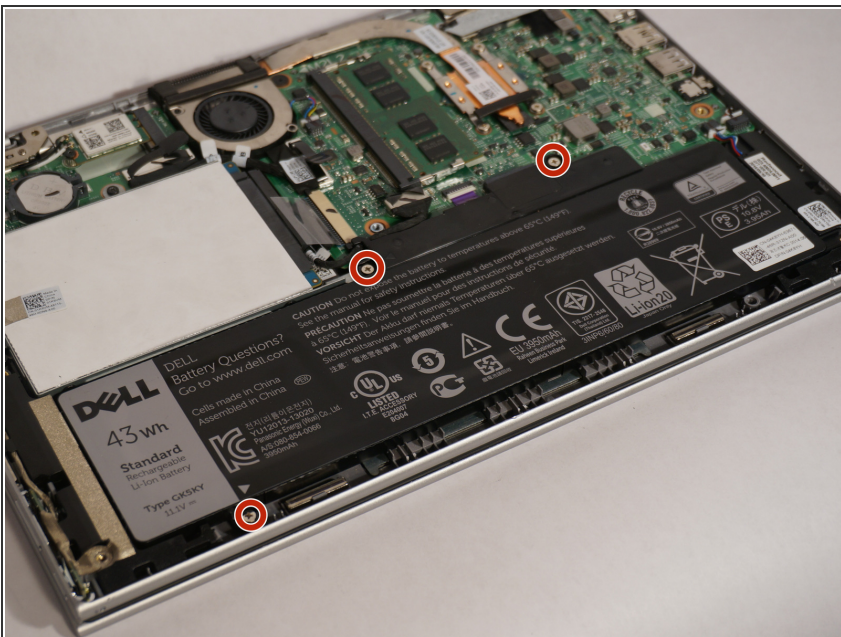

- The 4mm battery screws can be removed with a philips head #0 screw driver. All the screws that must be removed are shown in the attached pictures.
- Place screws close by in a safe place such as a magnetic board or cup so they are ready and accounted for when you begin reassembly.

DELL
43wh
Standard
Rechargeable
Li-Ion Battery
Type GK3KY
11.1V

Dell Battery Questions?
Go to www.dell.com

Cells made in China
Assembled in China

진리 (정리) (2.5V)
FU12015-0200
Polaris Corp (Dell Co., Ltd.)
AS5360-854-0056
3500mAh

CAUTION Do not expose the battery to temperatures above 65°C (149°F).
See the manual for safety instructions.
PRECAUTION Ne pas soumettre la batterie à des températures supérieures à 65°C (149°F). Voir le manuel pour des instructions de sécurité.
VORSICHT Der Akku darf niemals Temperaturen über 65°C ausgesetzt werden.
Sicherheitsanweisungen finden Sie im Handbuch.
注意：電池安全事項，請參閱說明書。

UL US
LISTED
17E A230007
3500mAh
6004

CE
EU 3500mAh
Polaris Battery Type
Li-Ion 20
311P4602/350

RECYCLED
90% MINIMUM
RECYCLED
90% MINIMUM
RECYCLED
90% MINIMUM

PS
90% MINIMUM
RECYCLED
90% MINIMUM

- Once the screws have been removed the battery may then be simply removed by hand and replaced.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 03:29:55 PM.